

# nifty

# 170

## TRAILER MOUNTED ACCESS PLATFORM

**17.10m (56ft 1in)**  
Working Height

**8.70m (28ft 6in)**  
Working Outreach

### Telescopic Upper Boom

Greater accuracy when  
positioning platform

### Hydraulic Powered Outriggers

Quick and easy set up

### Fully Proportional Hydraulic Controls

Designed for maximum operator  
efficiency

### Bi-Energy Power Available

Optimising utilisation



[niftylift.com](http://niftylift.com)




# nifty 170

With one of the largest working envelopes in its class, the Nifty 170 delivers maximum reach with stability and control. Octagonal boom sections provide strength without compromising on weight and the telescopic upper boom improves accuracy when positioning. Hydraulically operated outriggers and controls make setting up and operating quick and easy, especially on uneven surfaces.

## Safety Features

- ▶ Pressure sensitive outriggers with audible & visual alarms
- ▶ Dual controls (platform & base)
- ▶ Emergency descent system with hand-pump
- ▶ Lock valves on all hydraulic cylinders
- ▶ Double acting cylinders
- ▶ Overrun brake system with gas spring handbrake
- ▶ CE Mark

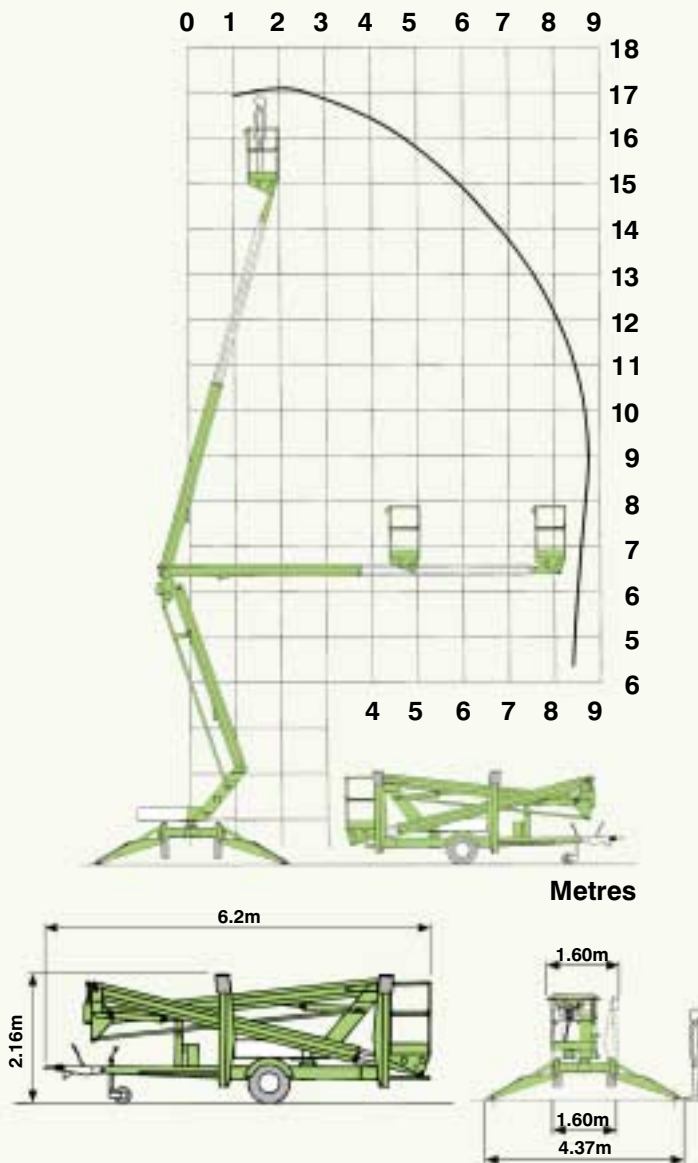

The Nifty 170's outstanding self-reach makes it ideal for a wide range of applications.

Also available on a self-driveable 2x4 or 4x4 base the Nifty 170SD.



Fully proportional hydraulic outriggers make setting up and levelling quick and easy even on gradients.

## Specifications

|   |  |                   |
|---|--|-------------------|
| <b>Working Height</b>                   | 17.10m   | 56ft 1in          |
| <b>Platform Height</b>                  | 15.10m   | 49ft 6in          |
| <b>Outreach</b>                         | 8.70m  | 28ft 6in          |
| <b>Slew</b>                             | 360°   |                   |
| <b>Travelling Width</b>                 | 1.60m  | 5ft 3in           |
| <b>Working Width</b>                    | 4.37m  | 14ft 4in          |
| <b>Height Stowed</b>                    | 2.16m  | 7ft 1in           |
| <b>Overall Length</b>                   | 6.20m  | 20ft 4in          |
| <b>Weight</b><br>(dependent on options) | 1900kg - 2000kg  | 4180lbs - 4400lbs |
| <b>Platform Rotation</b>                | 100° (optional)  |                   |
| <b>Platform Capacity</b>                | 200kg  | 440lbs            |
| <b>Platform Size</b>                    | 1.10m x 0.65m  | 3ft 8in x 2ft 1in |
| <b>Control Systems</b>                  | Fully proportional hydraulic controls  |                   |
| <b>Outriggers</b>                       | Hydraulic and manual options available   |                   |
| <b>Power Options</b>                    | Bi-Energy (engine and battery)<br>Mains only<br>Battery only<br>Petrol or diesel engine only |                   |

Due to a policy of continuing development and improvement Niftylift reserves the right to change any specification without notice. Please confirm exact specification before ordering.

Supplied by:

**Manufacturers of trailer mounted, self propelled and vehicle mounted platforms**

**Niftylift Ltd**

Fingle Drive  
Stonebridge  
Milton Keynes  
MK13 0ER  
England

www.niftylift.com

e.mail: info@niftylift.com

Tel: +44 (0)1908 223456

Fax: +44 (0)1908 312733

