



# TOUCAN 10E



The Toucan 10E combines JLG's proven heavy duty forklift-style mast technology with a host of new standard-setting features. It has two high-efficiency AC motors plus improved proportional drive and lift controls for smoother operation. It has a two-person indoor/outdoor rating. It's more efficient. It recharges faster and goes longer between charges. It's low noise and zero-emission. With a gradeability specification of 25%, the Toucan 10E makes light work of steep inclines. Its 345-degree swing makes positioning a snap. Then there are the new platform, new jib and extended outreach that together bring hard-to-reach places within reach – safely. Not to mention the rugged, non-marking tyres that ensure doors remain open and span. So whether the job involves assembly lines, shelves, ductwork or partitions, whether it's indoors or out, just grab the Toucan 10E and get it done.

## MORE PERFORMANCE

- 25% gradeability and improved ground clearance
- Easier set management
- Lower maintenance and running costs
- Easier to operate
- Higher drive speed
- Allows two persons for outside use

## TOUCAN 10E BENEFITS




The Toucan 10E delivers unrivalled value across the board. Take the simplified hydraulic system with just six hoses. The number of potential leakage points has been reduced by 75%. The advanced brushless AC motors with direct-drive technology deliver unmatched efficiency, noticeably cleaner and quieter operation, exceptional torque – and a faster drive speed of 5.5 km/h. Then there is the integrated rapid-charge power pack. With its 240 A/hr capacity, it will last a full shift. The Toucan 10E continues a number of 'classic' Toucan traditions as well. The heavy duty, jam free forklift-style mast is easier to inspect and maintain. The on-board diagnostic controls, based on an ADE (advanced design electronics) system, make troubleshooting a snap. Put it all together and you have the Toucan 10E in a nutshell: simply more value.

## MORE VALUE

## TOUCAN 10E SPECIFICATIONS

- Working height: 10.10 m
- Platform height: 8.10 m
- Stowed height: 1.99 m
- Overall width: 0.99 m
- Overall length: 2.82 m
- Up and over height: 6.51 m
- Horizontal outreach: 3.08 m
- Platform capacity: 200 kg
- Jib-overall length: 1.60 m
- Standard platform size: 0.90 x 0.70 m
- Ground clearance: 10.5 cm
- Weight: 2990 kg
- Drive speed, lowered: 5.5 km/h
- Drive speed, elevated: 0.75 km/h
- Gradeability: 25%
- Use: Inside and outside, 2 persons.
- Drive motors: 2 AC motors
- Hydraulic system: 6 L
- Standard equipment: Operator tool tray, non-marking tyres

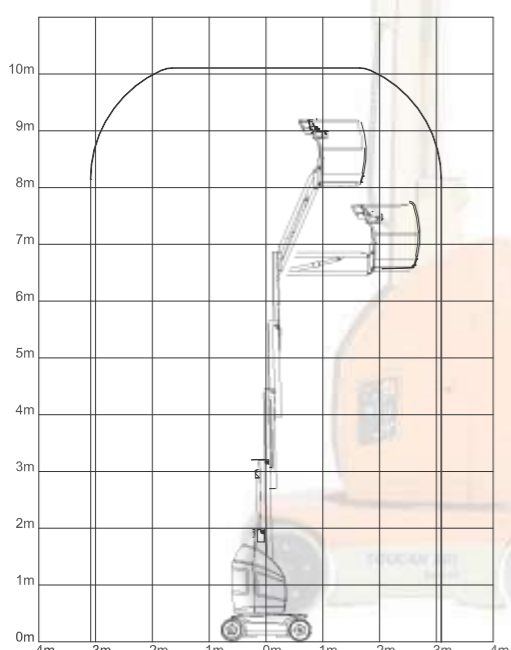

## GET MORE


Discover what Toucan 10E performance and value could do for you. Contact us at:

JLG Europe BV.  
Tel: +31 (0) 23 565 5665  
Fax: +31 (0) 23 557 2493  
Polaris Avenue 63  
2132 JH Hoofddorp  
The Netherlands

[www.jlgeurope.com](http://www.jlgeurope.com)

JLG® Industries, Inc. is a leading designer and manufacturer of access equipment and complementary services and accessories. JLG has manufacturing facilities in the United States, France and Belgium. Customers throughout Europe, Scandinavia, Africa and the Middle East benefit from a network of dedicated sales and service operations designed to deliver the highest levels of support. JLG is a subsidiary of Oshkosh Corporation.

JLG is continually researching and developing products and reserves the right to make modifications without prior notice. All data in this document is indicative. Certain options or country standards will increase weight. Specifications may change to meet country standards or with the addition of optional equipment.

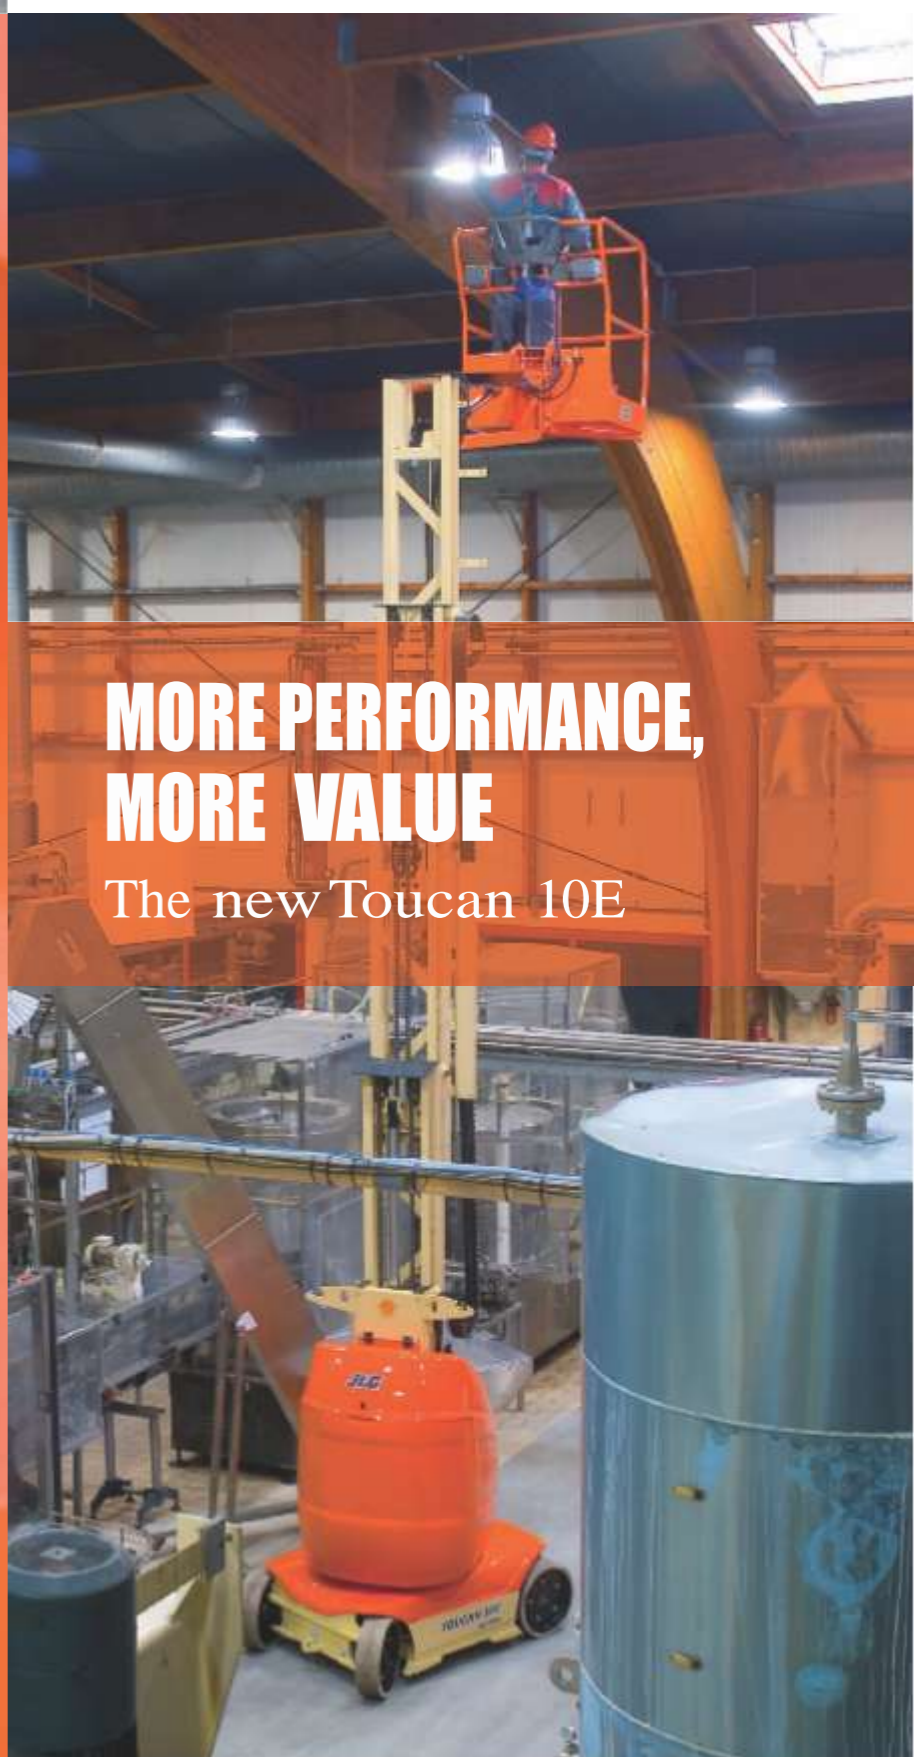

**MORE PERFORMANCE,  
MORE VALUE**  
The new Toucan 10E