

Tow-Pro™ Series

Trailer Mount Boom Lifts



T350
T500J

JLG®

P R E L I M I N A R Y S P E C I F I C A T I O N S

Only the world leader in aerial access equipment can offer you this much quality and performance at such an incredible value. With the rugged construction, advanced features and a proven boom design, you can be sure that the Tow-Pro™ series boom lifts from JLG® will deliver the power to do more.

MORE Control

With a compact size, efficient proportional controls, automatic self-leveling, and exclusive accessories, the Tow-Pro Series was designed to handle an amazing variety of tasks and put more power under your control.

MORE rigidity

Nothing boosts the confidence of workers on the job like the strength and reliability of a JLG boom. Our proven telescopic boom design provides a more rigid platform feel and has the strength to handle a variety of productivity enhancing accessories.

MORE speed

Easy to transport and easier to set up, the Tow-Pro Series helps make quick work of any job. With a standard combination hitch, up to 100 km/h (63 mph)* rated towing speed, and hydraulic auto-leveling outriggers, the Tow-Pro can be on the job, set up, and working in no time at all.

*May vary with country regulations

230 kg (500 lbs)
platform
capacity


0.76 m x 1.22 m
(30 x 48 in.) standard
aluminum platform

Standard
air and
water lines
to the
platform

2 models (T350/T500J)
with platform heights
of 10.67 m (35 ft.) and
15.24 m (50 ft.)

Ideal for:

- residential construction
- gutter cleaning
- tree trimming
- pressure washing
- decorating
- lighting
- painting
- schools/universities
- museums
- car parks
- sign companies
- roofers
- landscapers
- shopping malls
- park services
- golf courses
- and more

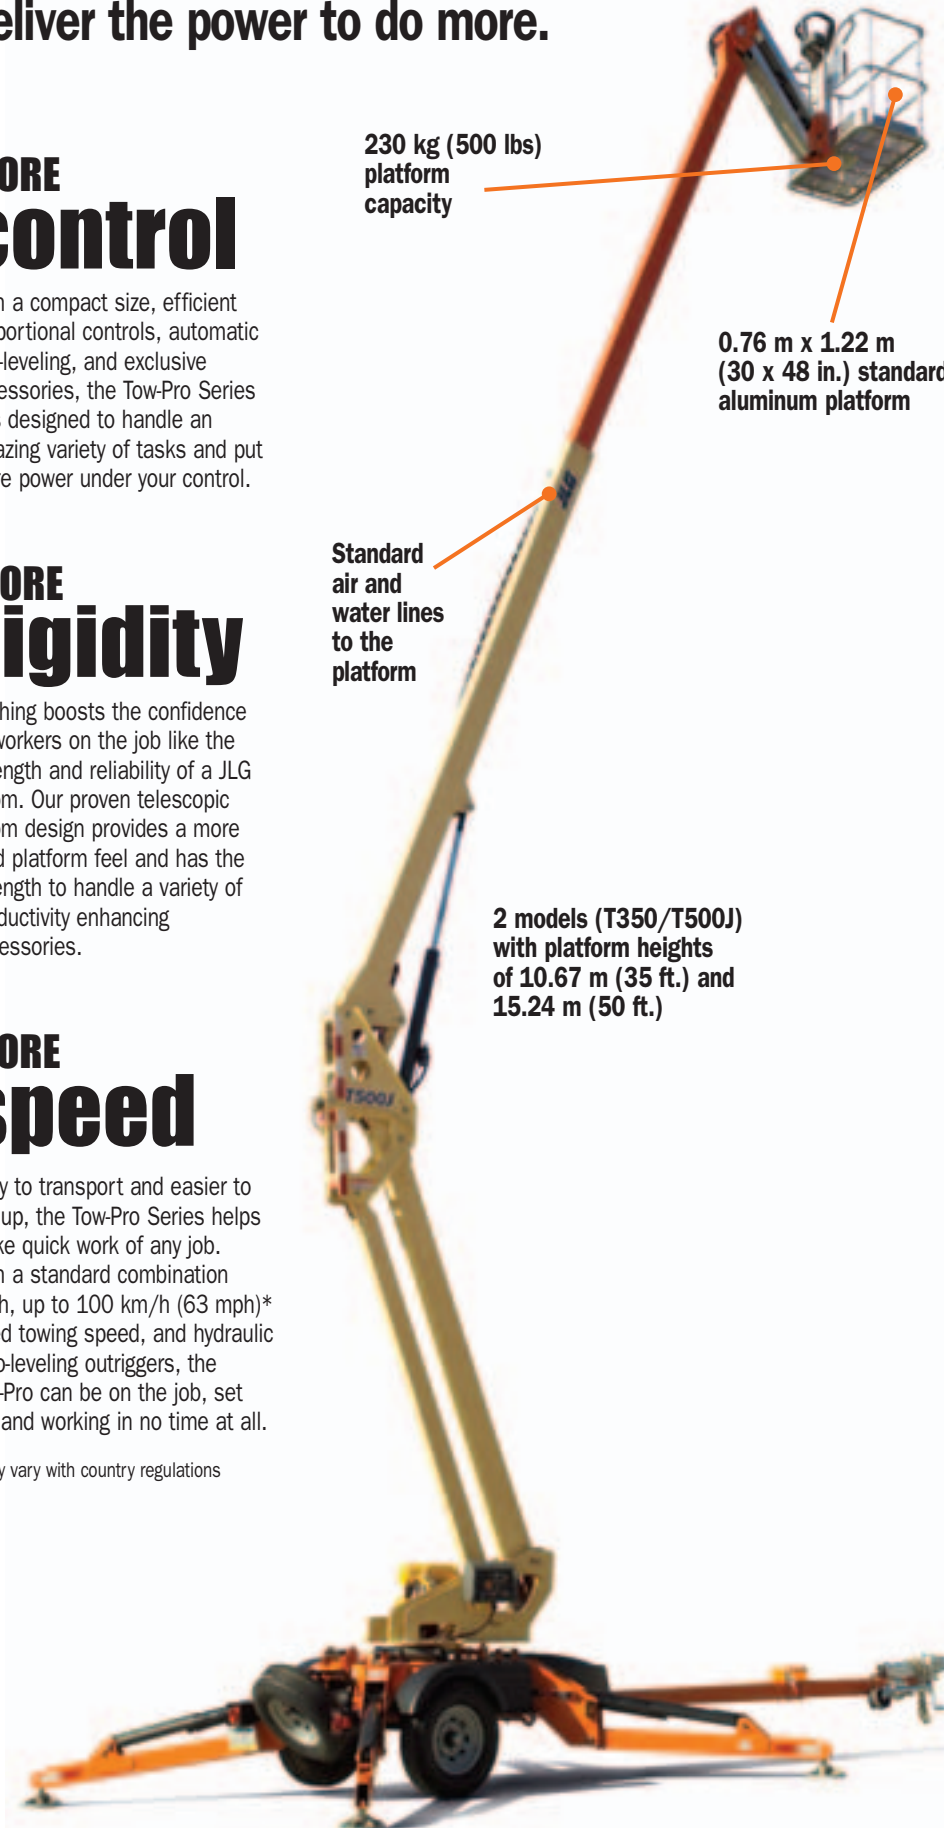




Innovative controls

Detachable platform controls provide faster and more efficient boom positioning with one-hand operation of all boom functions. Ground control buttons and switches feature high contrast graphics. Graphic symbols make the controls easier to identify and help reduce operator training time.

Easy to transport with a standard 50 mm ball hitch

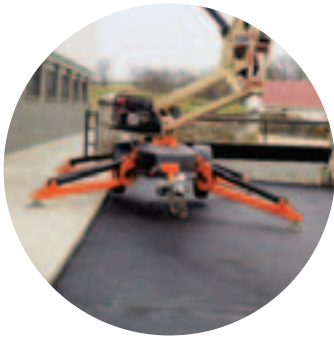

Boom orientation helps protect basket during towing (basket stows over the hitch side)

Easier to set up with hydraulic auto-leveling outriggers




Special Features

- 10.67 m (35 ft.) and 15.24 m (50 ft.) models
- Hydraulic auto-leveling outriggers for faster and easier set up
- Up to 100 km/h (65 mph)* rated towing speed
- 24V DC electric or gas powered engine
- Platform controls with one-hand operation of boom functions
- Accessory mounting tray accommodates customer-provided generator, air compressor or pressure washer
- Standard air and water lines to the platform

*May vary with country regulations

Articulating jib (model T500J) provides easier access to hard-to-reach areas

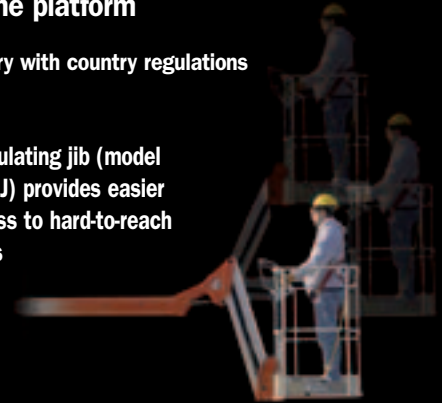

Productivity Enhancing Accessories



Standard accessory mounting tray for optional generator, air compressor or pressure washer



Optional drive and outrigger set from the platform





Optional bolt-on material handling hook



Optional non-marking outrigger pads

JLG MODEL T350

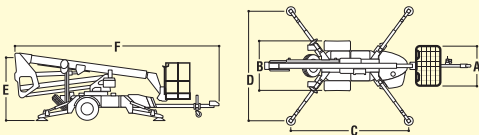
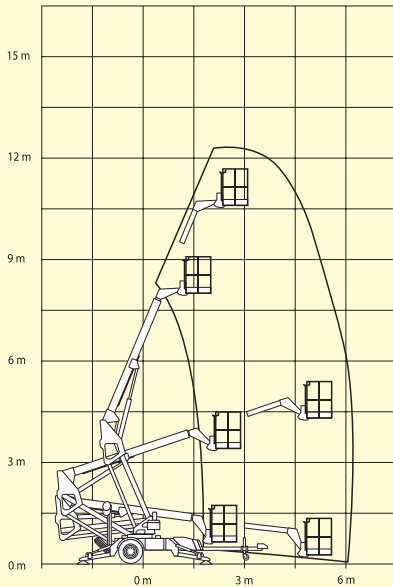


Platform Height.....	10.67 m (35 ft.)
Horizontal Outreach	
Working Outreach.....	6.14 m (20 ft. 2 in.)
From Outrigger Pad Edge.....	3.84 m (12 ft. 7 in.)
Up and Over Height.....	4.57 m (15 ft.)
Swing.....	410° Non-continuous
Platform Capacity.....	230 kg (500 lbs)
Platform Capacity w/Rotator.....	200 kg (440 lbs)
Material Hook Capacity.....	230 kg (500 lbs)
Platform Rotator (Optional).....	90° Manual
Jib Length.....	N/A
Jib Vertical Motion.....	N/A
A. Platform Size.....	0.76 m x 1.22 m (30 in. x 48 in.)
B. Stowed Width.....	1.50 m (4 ft. 11 in.)
C. Outrigger Footprint—Length.....	3.71 m (12 ft. 2 in.)
D. Outrigger Footprint—Width.....	3.43 m (11 ft. 3 in.)
E. Stowed Height.....	1.98 m (6 ft. 6 in.)
F. Stowed Length.....	6.50 m (21 ft. 4 in.)
Ground Clearance.....	254 mm (10 in.)
Entry Height—extended.....	267 mm (10 1/2 in.)
Leveling Capability.....	11°
Gross Vehicle Weight.....	1,556 kg (3,430 lbs)
Towing Speed Rating*.....	105 km/h (65 mph)
Tongue Weight.....	100 kg (221 lbs)
Brakes.....	Mechanical Surge
Parking Brakes.....	Standard
Tyre Size/Type.....	205/75 R14 Pneumatic
DC Power.....	24V DC
Batteries.....	4 x 6V, 220 A/hr
Gasoline Engine (Optional).....	Honda GSX 270—9 hp

* May vary with country regulations.

Specifications may change to meet country standards or with the addition of optional equipment.

JLG MODEL T500J

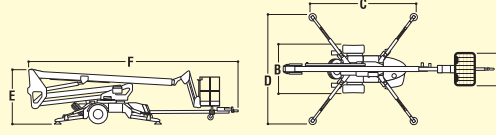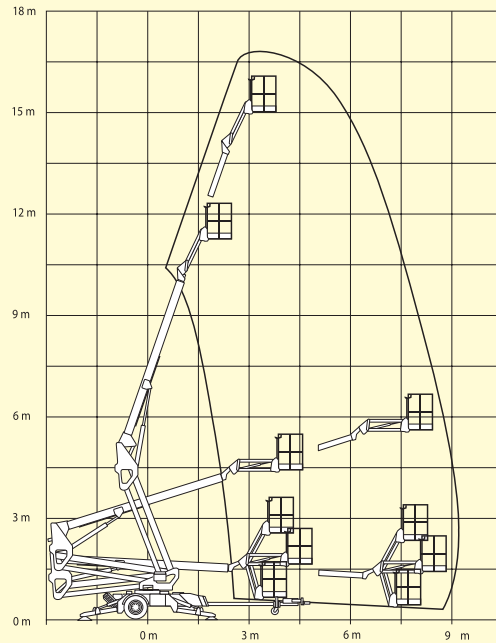

Platform Height.....	15.24 m (50 ft.)
Horizontal Outreach	
Working Outreach.....	9.60 m (31 ft. 6 in.)
From Outrigger Pad Edge.....	7.01 m (23 ft.)
Up and Over Height.....	5.48 m (18 ft.)
Swing.....	410° Non-continuous
Platform Capacity.....	230 kg (500 lbs)
Platform Capacity w/Rotator.....	200 kg (440 lbs)
Material Hook Capacity.....	230 kg (500 lbs)
Platform Rotator (Optional).....	90° Manual
Jib Length.....	1.22 m (4 ft.)
Jib Vertical Motion.....	130 degrees (+75, -55)
A. Platform Size.....	0.76 m x 1.22 m (30 in. x 48 in.)
B. Stowed Width.....	1.80 m (5 ft. 11 in.)
C. Outrigger Footprint—Length.....	4.11 m (13 ft. 6 in.)
D. Outrigger Footprint—Width.....	4.00 m (13 ft. 1 1/2 in.)
E. Stowed Height.....	2.13 m (7 ft.)
F. Stowed Length.....	8.36 m (27 ft. 5 in.)
Ground Clearance.....	254 mm (10 in.)
Entry Height—extended.....	376 mm (14 3/4 in.)
Leveling Capability.....	11°
Gross Vehicle Weight.....	2,372 kg (5,230 lbs)
Towing Speed Rating.....	105 km/h (65 mph)
Tongue Weight.....	156 kg (344 lbs)
Brakes.....	Mechanical Surge
Parking Brakes.....	Standard
Tyre Size/Type.....	205/75 R15 Pneumatic
DC Power.....	24V DC
Batteries.....	4 x 6V, 220 A/hr
Gasoline Engine (Optional).....	Honda GSX 270—9 hp

* May vary with country regulations.

Specifications may change to meet country standards or with the addition of optional equipment.

Standard Features

Telescopic Upper Boom, 1.22 m (4 ft.) Jib (T500J Only), 0.76 m x 1.22 m (30 in. x 48 in.) Side Entry Platform, Proportional Controls, AC Cable to the Platform, Auto-Leveling Hydraulic Outriggers, Motion Alarm, Tilt Alarm/Indicator Light, Hourmeter, 4 x 6V - 220 A/hr Batteries, Battery Condition Indicator, Parking Brake, 50 mm Ball Hitch.

Available Options Features

Platform Rotator, Material Hook (230 kg [500 lbs] capacity), Platform Mounted Glass/Panel Tray, Non-Marking Outrigger Pads, Full-Size Spare Tyre, Flashing Amber Beacon.

The JLG "1&5" Warranty

JLG Industries, Inc. backs our products with our exclusive "1 & 5" Warranty. We provide coverage on all products for one (1) full year, and cover all specified major structural components for five (5) years. Due to continuous product improvements, we reserve the right to make specification and/or equipment changes without prior notification.

This machine meets or exceeds applicable Regulations as originally manufactured for intended applications.



JLG Industries, Inc.

Kilmartin Place, Tannochside Park, Uddingston, G71 5PH, Scotland, United Kingdom
Tel: +44 (0) 1698 811005
Fax: +44 (0) 1698 811055
e-mail address: europe@jlg.com

www.jlg.com

