

CRT Series

**COMPACT ROUGH TERRAIN
SCISSOR LIFTS**



Greater Terrainability



**Strengthened Arm
Stack for Improved
Stack Rigidity**




**Roll-Out Engine Tray
for Serviceability**

**330CRT
400CRT**

www.jlg.com



JLG MODEL 330CRT & 400CRT

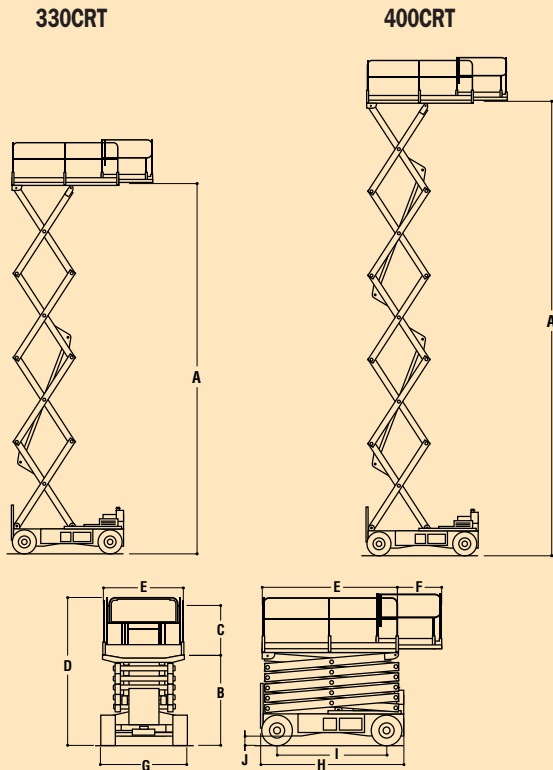

DIMENSIONAL DATA

A. Platform Height - Elevated (330CRT)	33 ft. (10.06 m)
(400CRT)	40 ft. (12.19 m)
B. Platform Height - Stowed (330CRT)	5 ft. 6.5 in. (1.69 m)
(400CRT)	6 ft. 8.5 in. (2.04 m)
C. Platform Railing Height	3 ft. 7.5 in. (1.1 m)
D. Overall Height (Rails Up) (330CRT)	9 ft. (2.74 m)
(400CRT)	9 ft. 2.5 in. (2.81 m)
Overall Height (Rails Down)	6 ft. 5.5 in. (1.97 m)
E. Platform Size	65 x 115 in. (1.65 x 2.92 m)
F. Platform Extension	3 ft. (91 cm)
G. Overall Width	5 ft. 9 in. (1.75 m)
H. Overall Length	10 ft. 2 in. (3.1 m)
I. Wheelbase	90.5 in. (2.3 m)
J. Break-over Ground Clearance	10 in. (25 cm)
Platform Capacity (330CRT)	1,000 lbs. (450 kg)
(400CRT)	800 lbs. (360 kg)
Platform Extension Capacity	250 lbs. (113 kg)
Lift/Lower Time (330CRT)	38/42 seconds
(400CRT)	54/50 seconds
Maximum Drive Height (330CRT)	Full Elevation
(400CRT)	30 ft. (9.1m)
Gross Vehicle Weight (330CRT)	9,100 lbs. (4,128 kg)
(400CRT)	10,020 lbs. (4,545 kg)

CHASSIS

Maximum Travel Speed	3.5 mph (5.6 kph)
Maximum Gradeability	35%
Turning Radius (Inside)	7 ft. (2.13 m)
Tire Size/Type	30.4 x 10 Foam Filled Lug
Oscillating Axle	Optional
Brakes	Spring Applied Hydraulic Released

POWER SOURCE

Dual Fuel Engine	Kubota 750 24.5 hp (18.3 kW)
Diesel Engine	Kubota 1105 28 hp (21.7 kW)
Fuel Tank Capacity	13 gal. (49 L)
Hydraulic Reservoir	18 gal. (68 L)

PERFORMANCE FEATURES

Standard Features

- Four-Wheel Drive
- Oscillating Axle
- 3 ft. (91 cm) Deck Extension
- 65 x 115 in. (1.65 x 2.92 m) Steel Platform
- Moveable, Removable Platform Control Box
- Fold-Down Handrails
- Access Gate with Chain
- Proportional Hydrostatic Drive Control with Thumb Steer
- Proportional Lift Up
- 3 Degree Slope Alarm and Light
- 110V-AC Receptacle in Platform
- Horn
- Hourmeter
- Lubrication-Free Scissor Arm Bushings
- Scissor Maintenance Prop
- Manual Descent Pull Cable
- Descent Alarm
- Heavy Gauge Steel Chassis Compartment Hoods
- 30.4 x 10 in. Foam Filled Lug Tires

Available Options

- Hydraulic Leveling Jacks
- Platform Work Lights
- Full Swing Gate
- Tow Package
- Head and Tail Lights
- 110V AC Power Pack (Generator)
- All Motion Alarm
- Flashing Beacon
- 43.5 lb. (19.73 Kg) Propane Tank
- Spark Arrestor Muffler

A New Level In Scissor Lift Design and Performance

JLG has created a new, high performance compact rough terrain (CRT) scissor lift series. Combining the improved terrainability of a larger rough terrain scissor lift with the compactness and maneuverability of a smaller scissor lift, the CRT Series is equally at home on or off slab.

- 35% gradeability boosts job site productivity
- 7 ft. (2.13 m) turning radius makes it easier to maneuver in tight spaces
- Compact design provides access through standard double doors
- Access gate slides up for drywall loading
- Deck length accommodates oversized drywall sheets
- Roll-out engine tray simplifies servicing

Wide-Arm Stack

Scissor arm stance provides outstanding strength, durability and reduced arm deflection and sway.

The JLG 1 & 5 Warranty

JLG Industries, Inc. backs our products with our exclusive "1 & 5" Warranty. We provide coverage on all products for one (1) full year, and cover all specified major structural components for five (5) full years. Due to continuous product improvements, we reserve the right to make specification and/or equipment changes without prior notification. These machines meet or exceed applicable OSHA Regulations in 29 CFR 1910.67, 29 CFR 1926.453 and ANSI A92.6-1999 as originally manufactured for intended applications.

JLG Industries, Inc.

1 JLG Drive
 McConnellsburg, PA 17233-9553
 Telephone 717-485-5161
 Toll-free in US 877-JLG-LIFT
 Fax 717-485-6417
www.jlg.com

Printed in USA
 FORM NO.: SS-CRT-100-50M
 PART NO.: 3131403
 R08001

