
ARTICULATING BOOM LIFTS



Cont Proper

Proportional Drive Controls

Proportional controls provide operation for telescoping the main and tower boom and drive, lift and swing.

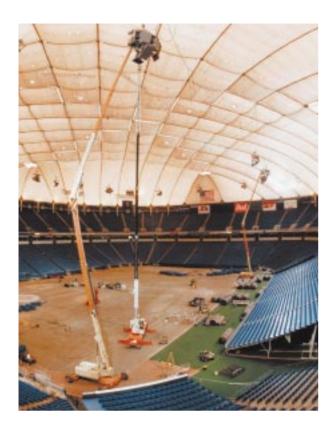

Moveable Ground Control

The ground controls can be detached from the machine housing to aid the operator when loading the machine for transport.



Plate Steel Boom

Provides longer service life and minimal deflection for operator comfort.

JLG 150HAX

- Largest self-propelled lift in the world at a working height of 47 m
 - Longest outreach at 24.16 m of any self-propelled lift in the world
 - Up and over height 24.38 m
 - Fast boom and drive speeds improve work productivity
 - Four wheel drive and four wheel steer is standard
- Proportional controls achieve smoother movement for operator comfort
 - Excellent manoeuvrability for positioning of machine and platform

For more details check the JLG Technical Specification Guide or ask your local JLG representative.



165° Powered Rotator

A sealed hydraulic platform rotator with 165 degrees of motion for improved positioning.



Ground to Platform Intercom System

An intercom system is supplied to permit communication between platform and ground personnel.



Extending Axles

Help to reduce stowed width for travel in confined areas and for ease of transport.



JLG Industries (Europe), A Division of JLG Industries, Inc.
Kilmartin Place, Tannochside Park,
Uddingston, G71 5PH, Scotland.
Tel: 01698 811005
Fax: 01698 811055

www.jlg.com



Printed in UK PART NO.: SL080-ENGLISH