

## JLG 600 CRAWLER SERIES



- Choice of models with working heights from 20 m to 22 m\*
- Steel crawler tracks provide incredible 55% gradeability
- Increased manoeuvrability on soft terrain due to 0.4 kg/cm<sup>2</sup> low ground bearing pressure
  - Fast boom and drive speeds improve work productivity
  - Multiple simultaneous boom functions get you to the job quicker
- Single drive/steer joystick proportional controls achieve smoother movement for operator comfort
- Excellent manoeuvrability for positioning of machine and platform


\* Model 600SC & 600SJC - 20 m working height  
Model 660SJC - 22 m working height

For more details check the JLG Technical Specification Guide or ask your local JLG representative.



### Greater Terrainability

With a 55% gradeability, this boom lift can go anywhere it needs to go.

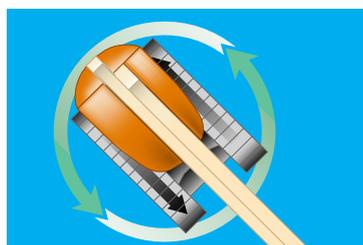

### Faster Positioning

Tracks move in opposite directions to provide a zero turning radius for faster positioning.



### Single Drive/Steer Joystick Controller

The intuitive single drive/steer joystick makes it simpler to control when driving.



### Articulating Jib\*

Allows for greater versatility when positioning the platform around obstacles.  
\*Model 600SJC & 660SJC only.



### Low Ground Bearing Pressure

Improves manoeuvrability when travelling on wet ground or sand.



### Greater serviceability

Improved access with an engine swing-out tray.

### JLGEUROPE

JLG Industries (Europe), A Division of JLG Industries, Inc.  
Kilmartin Place, Tannochside Park,  
Uddingston, G71 5PH, Scotland.  
Tel: 01698 811005  
Fax: 01698 811055

[www.jlg.com](http://www.jlg.com)

