

nifty

HR17 4x4

SELF PROPELLED ACCESS PLATFORM



17.20m (56ft 6in)

Working Height

9.60m (31ft 6in)

Working Outreach

45% Gradeability

4WD for Rough Terrain

Suspension System

Improved traction on uneven
terrain

2.00m Chassis Width

Operation in Confined Areas

**Fully Proportional
Hydraulic Controls**

Simple, reliable &
Easy to Use

1.80m Wide Platform

Improving Operator Comfort

**Platform Rotation
& Flyboom**

Improved access to applications



niftylift.com





niftylift

Heightrider 17

The Nifty Height Rider 17 will lift 2 men and their tools to a working height of over 17m or an outreach of 9.6m. Fully proportional hydraulic controls make the HR17 simple to use, reliable and easy to maintain, keeping running costs low and minimising downtime. Platform rotation and a 150° flyboom give greater control over positioning the platform making jobs both quicker and easier than before. Its weight saving and compact chassis give the HR17 excellent manoeuvrability on site and its powerful 4-Wheel Drive ensure that it can handle even the roughest terrain.

SAFETY FEATURES

- Automatic Failsafe Brakes
- Tilt Alarm
- Foam Filled Tyres
- Emergency Descent with Hand Pump
- Dual Controls (Platform & Base)
- Lock Valves on all Hydraulic Cylinders
- Dual Harness Points
- CE Marked

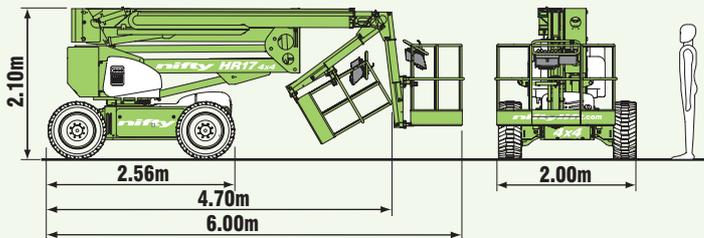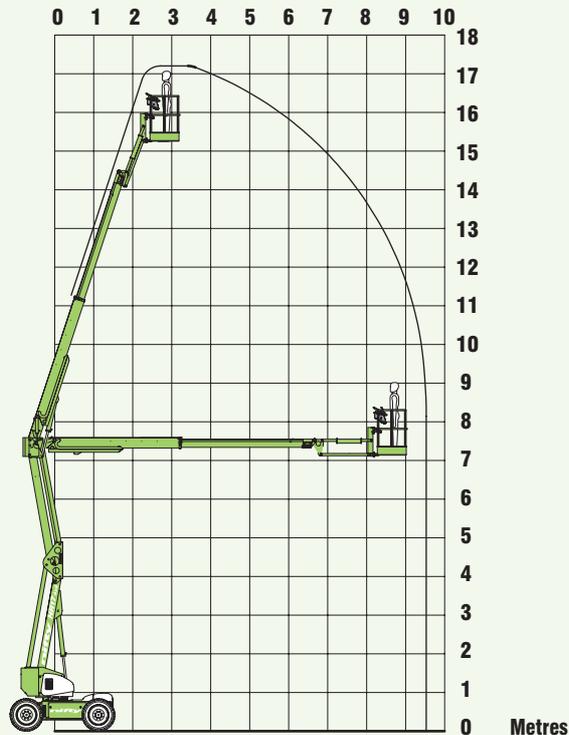

The Nifty HR17's unique suspension system ensures maximum traction when travelling over uneven ground and the 1.8m wide platform allows the operator ample space for tools.

SPECIFICATIONS

Working Height	17.20m	56ft 6in
Platform Height	15.20m	49ft 10in
Working Outreach	9.60m	31ft 6in
Slew	360°	
Flyboom Arc	150°	
Width	2.00m	6ft 7in
Height - Overall	2.10m	6ft 11in
Length - Stowed	6.00m	19ft 8in
- Overall	4.70m	15ft 5 in
Weight	6,140kg*	13,508lbs*
Turning Radius - Inside	1.75m	5ft 9in
- Outside	4.22m	13ft 10in
Platform Rotation	100°	
Platform Capacity	225kg	
Platform Size	1.80m x 0.70m	5ft 11in x 2ft 4in
Drive Speed	6.6kph	4.1mph
Gradeability	45%	
Control System	Fully Proportional Hydraulic	
Power System	Kubota 1505 32Hp Diesel	

* Weights may vary according to specification, please confirm before ordering.

Due to a policy of continuing development and improvement, Niftylift reserves the right to change any specification without notice. Please confirm exact specification before ordering.

Supplied by:

Manufacturers of trailer mounted,
self propelled and vehicle mounted



NIFTYLIFT LTD
Fingle Drive
Stonebridge
Milton Keynes
MK13 0ER
England

www.niftylift.com
e-mail: info@niftylift.com
Tel.: +44 (0) 1908 223456
Fax.: +44 (0) 1908 312733