

TELESCOPIC BOOM LIFTS



	600S	600SJ	660SJ	601S
Platform Height	18.29 m	18.29 m	20.12 m	18.29 m
Horizontal Outreach	15.09 m	15.34 m	17.30 m	14.93 m
Swing (Continuous)	360°	360°	360°	360°
Platform Capacity – Unrestricted	230 kg	230 kg	230 kg	230 kg
Platform Rotator (Hydraulic)	160°	180°	180°	160°
Jib – Overall Length	—	1.83 m	1.83 m	—
Jib - Range of articulation	—	130° (+70°/-60°)	130° (+70°/-60°)	—
A. Platform Size	0.91 m x 1.83 m	0.91 m x 1.83 m	0.91 m x 1.83 m	0.76 m x 1.83 m
B. Overall Width	2.44 m	2.44 m	2.44 m	2.44 m
C. Tailswing (working condition)	1.14 m	1.14 m	1.14 m	1.14 m
D. Stowed Height	2.56 m	2.56 m	2.56 m	2.54 m
E. Overall Length	8.61 m	10.16 m	10.84 m	8.36 m
F. Stowed Length	8.61 m	9.55 m	10.31 m	8.36 m
G. Wheelbase	2.48 m	2.48 m	2.48 m	2.46 m
H. Ground Clearance	0.30 m	0.30 m	0.30 m	0.30 m
Gross Vehicle Weight ¹	10,800 kg	11,525 kg	13,115 kg	10,330 kg
Maximum Ground Bearing Pressure	4.22 kg/cm ²	4.36 kg/cm ²	4.96 kg/cm ²	4.93 kg/cm ²
Maximum Tyre Load	5,354 kg	5,626 kg	6,455 kg	6,825 kg
Drive Speed 2WD	7.2 km/h	7.2 km/h	7.2 km/h	—
Drive Speed 4WD	6.4 km/h	6.4 km/h	6.4 km/h	4.82 km/h
Gradeability 2WD	30%	30%	30%	—
Gradeability 4WD	45%	45%	45%	45%
Tyres	15 x 19.5 Foam Filled	15 x 19.5 Foam Filled	15 x 19.5 Foam Filled	14 x 17.5 Foam Filled
Axle Oscillation (optional)	0.20 m	0.20 m	0.20 m	0.20 m
Turning Radius – Inside 2WS	3.66 m	3.66 m	3.66 m	5.25 m
Turning Radius – Inside 4WS	1.65 m	1.65 m	1.65 m	—
Turning Radius – Outside 2WS	5.41 m	5.41 m	5.41 m	6.20 m
Turning Radius – Outside 4WS	3.45 m	3.45 m	3.45 m	—
Diesel Engine	48.5 kW Deutz F4M1011F	48.5 kW Deutz F4M1011F	48.5 kW Deutz F4M1011F	35 kW Deutz F3M1011F
Fuel Tank Capacity	147.6 L	147.6 L	147.6 L	98.4 L
Hydraulic Reservoir	117.3 L	117.3 L	117.3 L	117.3 L
Auxiliary Power	12V DC	12V DC	12V DC	12V DC

¹ Certain options or country standards will increase weight.



Specifications may change to meet country standards or with the addition of optional equipment.





JLG MODEL 600S

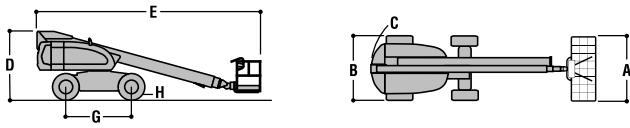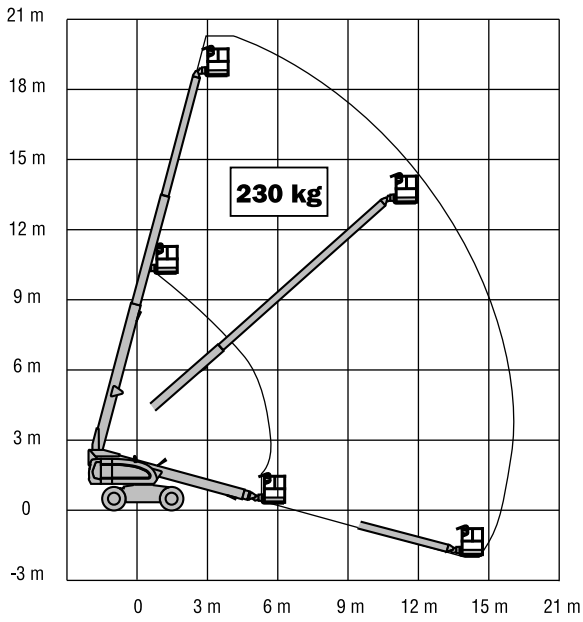

JLG MODEL 600SJ

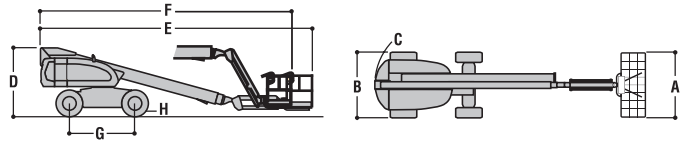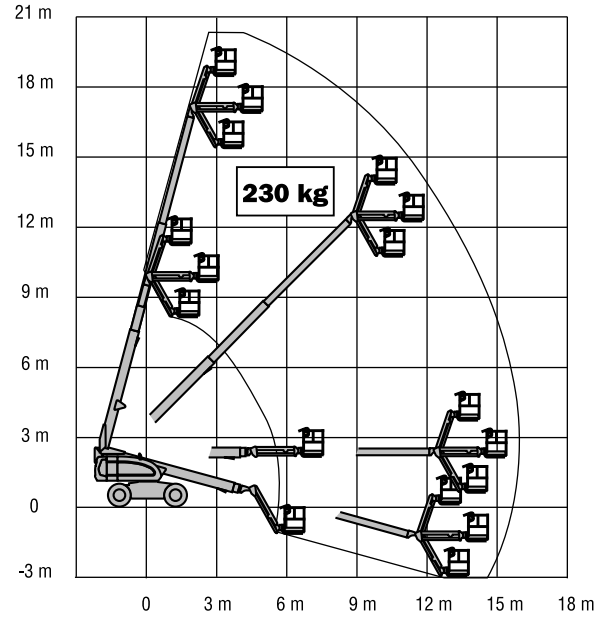

JLG MODEL 660SJ

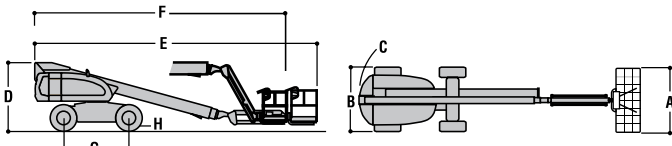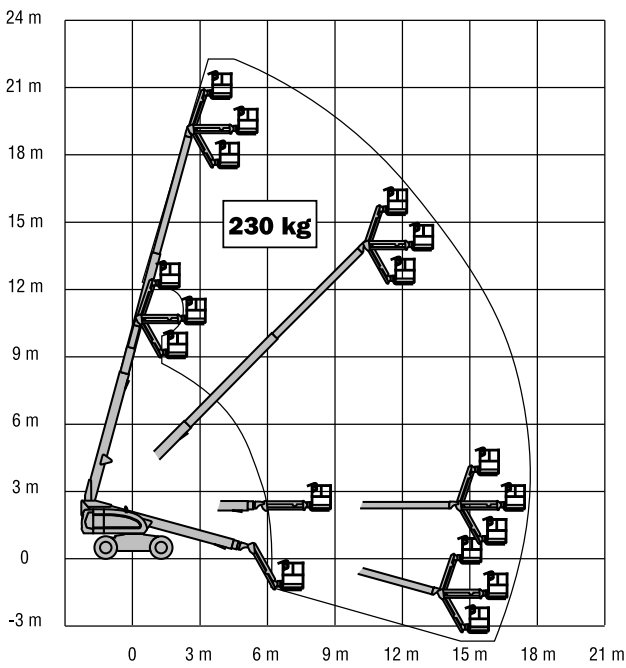

JLG MODEL 60IS

